Bedrosians

Yorkwood Glazed Porcelain



Honey 100006748 - 12"x72" Rectified Field Tile - Matte



Natural 100006749 - 12"x72" Rectified Field Tile - Matte



Walnut 100006751-12"x72" Rectified Field Tile - Matte



Brown
100006747 - 12"x72" Rectified Field Tile - Matte



Navy 100006750 - 12"x72" Rectified Field Tile - Matte




Classic 01 (Brown)
100006752-36"x36" Rectified Deco Tile - Matte



Classic 02 (Honey)
100006753-36"X36"Rectified Deco Tile - Matte

*60 faces per plank color & 12 faces per deco color

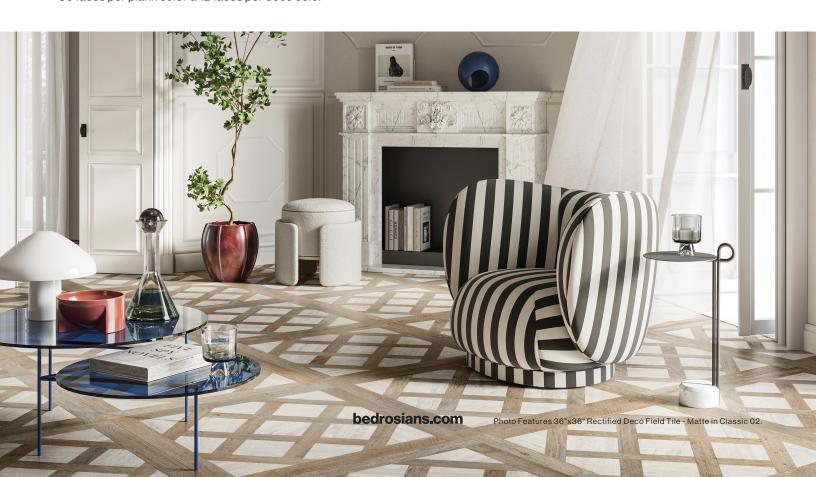




SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs/Ctn	Sf / Ctn
Field		100006747	12"x72"	Rectified Field Tile - Matte in Brown	4	23.24
		100006748	12"x72"	Rectified Field Tile - Matte in Honey	4	23.24
		100006749	12"x72"	Rectified Field Tile - Matte in Natural	4	23.24
		100006750	12"x72"	Rectified Field Tile - Matte in Navy	4	23.24
		100006751	12"x72"	Rectified Field Tile - Matte in Walnut	4	23.24
		100006752	36"x36"	Rectified Deco Field Tile - Matte in Classic 01 (Brown)	2	17.43
		100006753	36"x36"	Rectified Deco Field Tile - Matte in Classic 02 (Honey)	2	17.43

ANSITECHNICAL SPECIFICATIONS

	DCOF Acutest	PEI Rating ASTM# C1027	Frost Resistant ASTM# C1026	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650
Results	≥0.42	5	Unaffected	N/A	Pass (1,300 ISO)	≤0.5%	Unaffected



APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential	• †	•	•	•†	•	•
Commercial	• †	•	•	•†	•	•



LEGEND

- Product rated for Interior & Exterior use
 - Applications & ANSI Technical Specifications do not apply
- Product rated for Interior use only
 - * Special Order only
- † May be suitable for Exterior Floors



Use of a leveling system during installation is strongly recommended







Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.