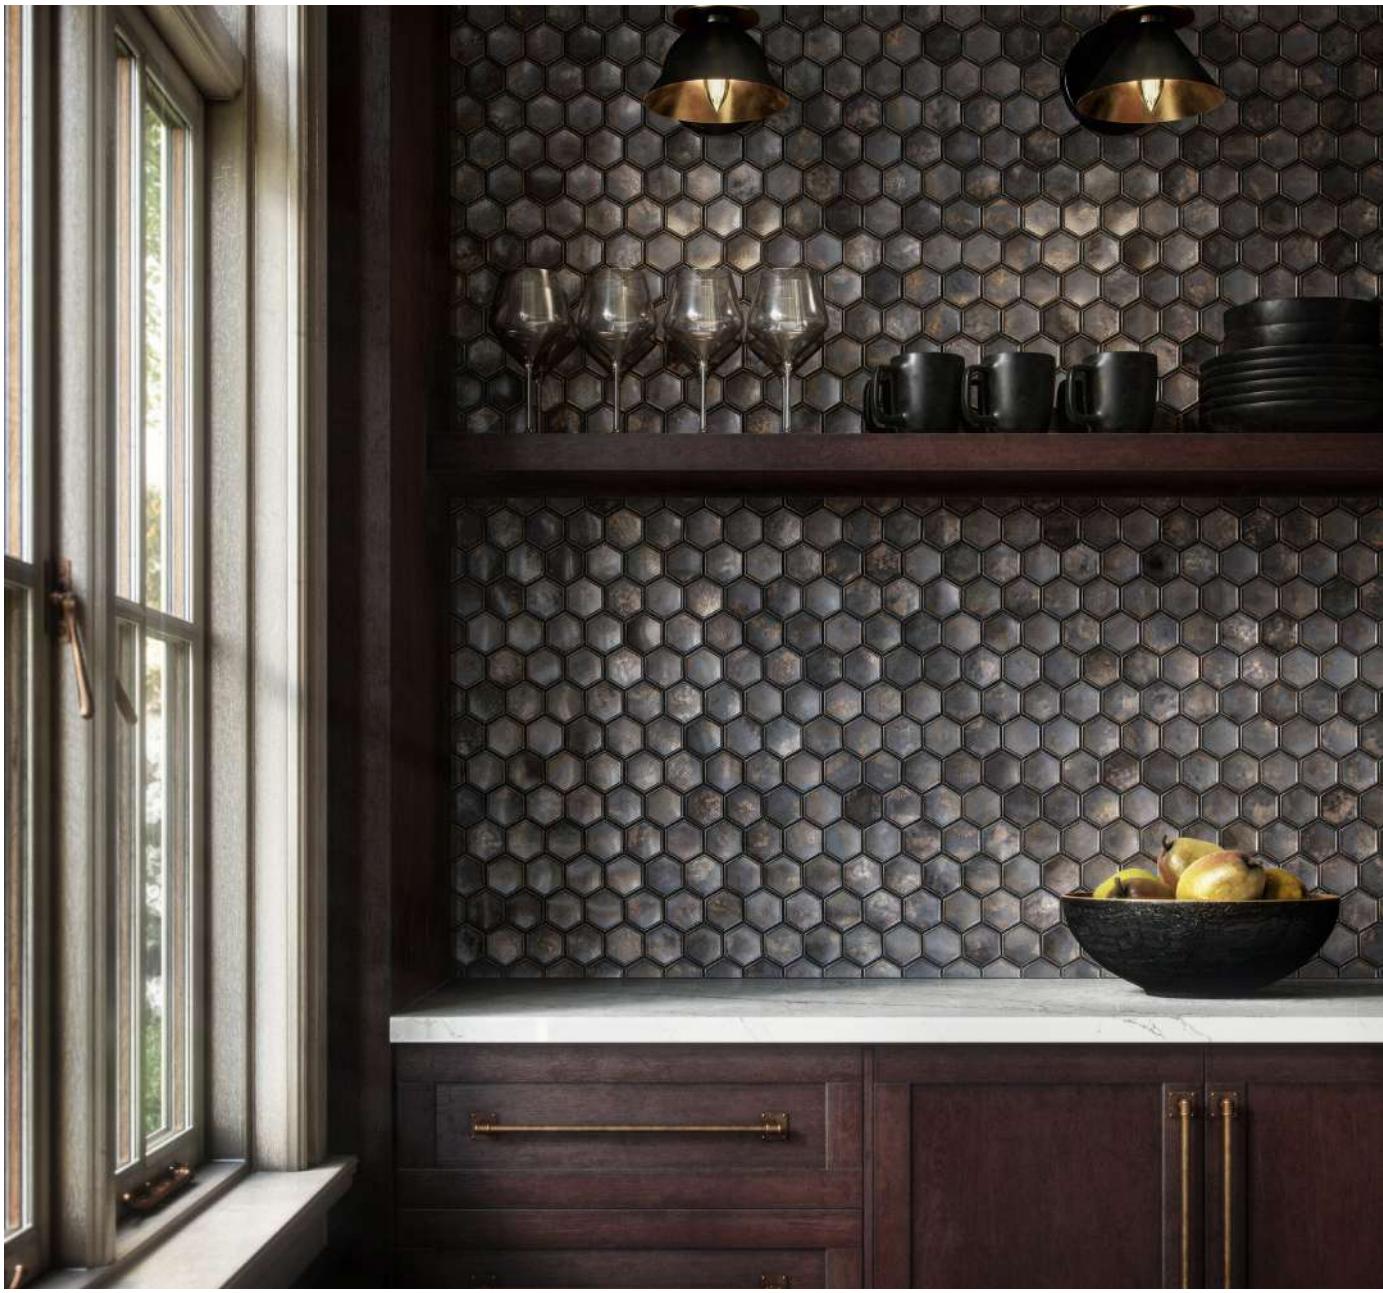


ARTEFINO™



GLAZED PORCELAIN

daltile®

REVEAL ARTISANAL MOSAIC ALLURE

YOUR MASTERPIECE AWAITS.

DISCOVER THE ENCHANTING WORLD OF ARTEFINO, AN ELEGANT MOSAIC SERIES THAT CALLS YOU TO REIMAGINE YOUR SPACE. WITH AN EXTENSIVE SELECTION OF UNIQUE SHAPES AND A CAPTIVATING PALETTE OF DEEP JEWEL TONES, PLAYFUL PASTELS, SULTRY METALLICS AND CONTEMPORARY MATTE COLORS, ARTEFINO ELEVATES DESIGN TO AN ART FORM. EACH PIECE IS METICULOUSLY CRAFTED, OFFERING UNPARALLELED VERSATILITY AND STYLE. UNVEIL THE HIDDEN TREASURES OF ARTEFINO AND LET YOUR SPACE TRANSFORM INTO A MASTERPIECE.

IMAGINE WHAT'S POSSIBLE™ WITH DALTILE DESIGNS

Cover photo features Artefino™ Jewel Antiqued Brass, Framed Hexagon mosaic on the wall and One Quartz Surfaces® Calacatta Cathedral on the countertop.
Above photo features Artefino™ Vintage Angelite, Floret mosaic on the wall and Natural Stone Quartzite Moreno on the countertop.



MOSAIC

USAGE

- FLOOR
- WALL
- COUNTERTOP
- SHOWER FLOOR
- EXTERIOR FLOOR

SPECIAL FEATURES

- STEPWISE™
- TRU-EDGE™
- REVEAL SYNC3D™
- MADE IN THE U.S.A.
- LARGE FORMAT
- MOSAIC/ DECO
- ENCAUSTIC
- TERRAZZO
- PAVER
- CUSTOMIZE

PG GLAZED PORCELAIN

$ LOW HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

ARTEFINO™
GLAZED PORCELAIN

ARTEFINO™ VINTAGE


2 X 6 FISH SCALE MOSAIC


FOSSIL AR11


SMOKEY GRAY AR12


CELESTITE AR13


AZURITE AR14


MORGANITE AR15


JASPER AR16


VERDELITE AR17


1 X 6 PENCIL MOSAIC



FOSSIL AR11


SMOKEY GRAY AR12


CELESTITE AR13


AZURITE AR14


MORGANITE AR15


JASPER AR16


VERDELITE AR17

1/2 X 6 PYRAMID MOSAIC


PEARL AR44


AMBER AR45



SAFFRON AR46



JADE AR47



ANGELITE AR48


2" FLORET MOSAIC


PEARL AR44


AMBER AR45


SAFFRON AR46


JADE AR47


ANGELITE AR48


SLIP RESISTANT


WATERPROOF


STAINPROOF


DENTPROOF


SCRATCH-RESISTANT


CLIMATEPRO™


SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DALTILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

SIZES:


Floret Mosaic | Pyramid Mosaic | Fish Scale Mosaic | Pencil Mosaic | Capsule Mosaic | Framed Hexagon Mosaic | Pyramid Hexagon Mosaic


FINISHES: GLOSSY | SATIN I MATTE

ARTEFINO™ JEWEL

2-1/2" FRAMED HEXAGON MOSAIC



ANTIQUED BRASS AR21



SAPPHIRE AR19


OBSIDIAN AR20

3" PYRAMID HEXAGON MOSAIC


OYSTER AR27



AQUAMARINE AR25



EMERALD AR26


ARTEFINO™ ELEMENT


1-1/2 X 6 CAPSULE MOSAIC


WHITE AR33


SAND AR34


STONE AR35


FOREST AR37


NAVY AR38


CHARCOAL AR36

VIBRANT ARTISTIC EXPRESSION



Above photo features Artefino™ Vintage Jasper, Fish Scale Mosaic on the wall and desk and Panoramic Porcelain Surfaces™ Calacatta Aries on the floor.

MOSAIC

ARTEFINO™ VINTAGE

GLAZED PORCELAIN

SIZES

			Thickness	Finish
	2" Floret Mosaic (Mesh-mounted)	(11-3/4" x 11-3/4" Sheet) (29.79 cm x 29.79 cm Sheet)	3/8"	G
	2 x 6 Fish Scale Mosaic (Mesh-mounted)	(12-15/16" x 12-5/8" Sheet) (32.89 cm x 32.10 cm Sheet)	1/4"	G
	1 x 6 Pencil Mosaic (Mesh-mounted)	(11-13/16" x 11-5/8" Sheet) (30.00 cm x 29.59 cm Sheet)	5/16"	G
	1/2 x 6 Pyramid Mosaic (Mesh-mounted)	(12" x 11-3/4" Sheet) (30.40 cm x 29.79 cm Sheet)	5/16"	G

G Glossy Finish

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 5.0%
Breaking Strength	C648	>250 lbs
Scratch Hardness	C1895	4.0 - 6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	High (V3)

NOTES

Since there are variations in all fired ceramic and natural products, tileand trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

SOPHISTICATED CHARM



Above photo features Artefino™ Jewel Oyster, Pyramid Hexagon mosaic, and Panoramic Porcelain Surfaces™ Opalite on the countertop.

ARTEFINO™ JEWEL

GLAZED PORCELAIN

MOSAIC

SIZES

			Thickness	Finish
	2-1/2" Framed Hexagon Mosaic (Mesh-mounted)	(14-7/16" x 12-1/16" Sheet) (36.60 cm x 30.61 cm Sheet)	1/4"	G S
	3" Pyramid Hexagon Mosaic (Mesh-mounted)	(12-1/16" x 11-1/8" Sheet) (30.61 cm x 28.19 cm Sheet)	5/16"	G

G Glossy finish S Satin Finish available in color AR21 only.

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 5.0%
Breaking Strength	C648	> 250 lbs
Scratch Hardness	C1895	4.0 - 6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	Medium (V2)

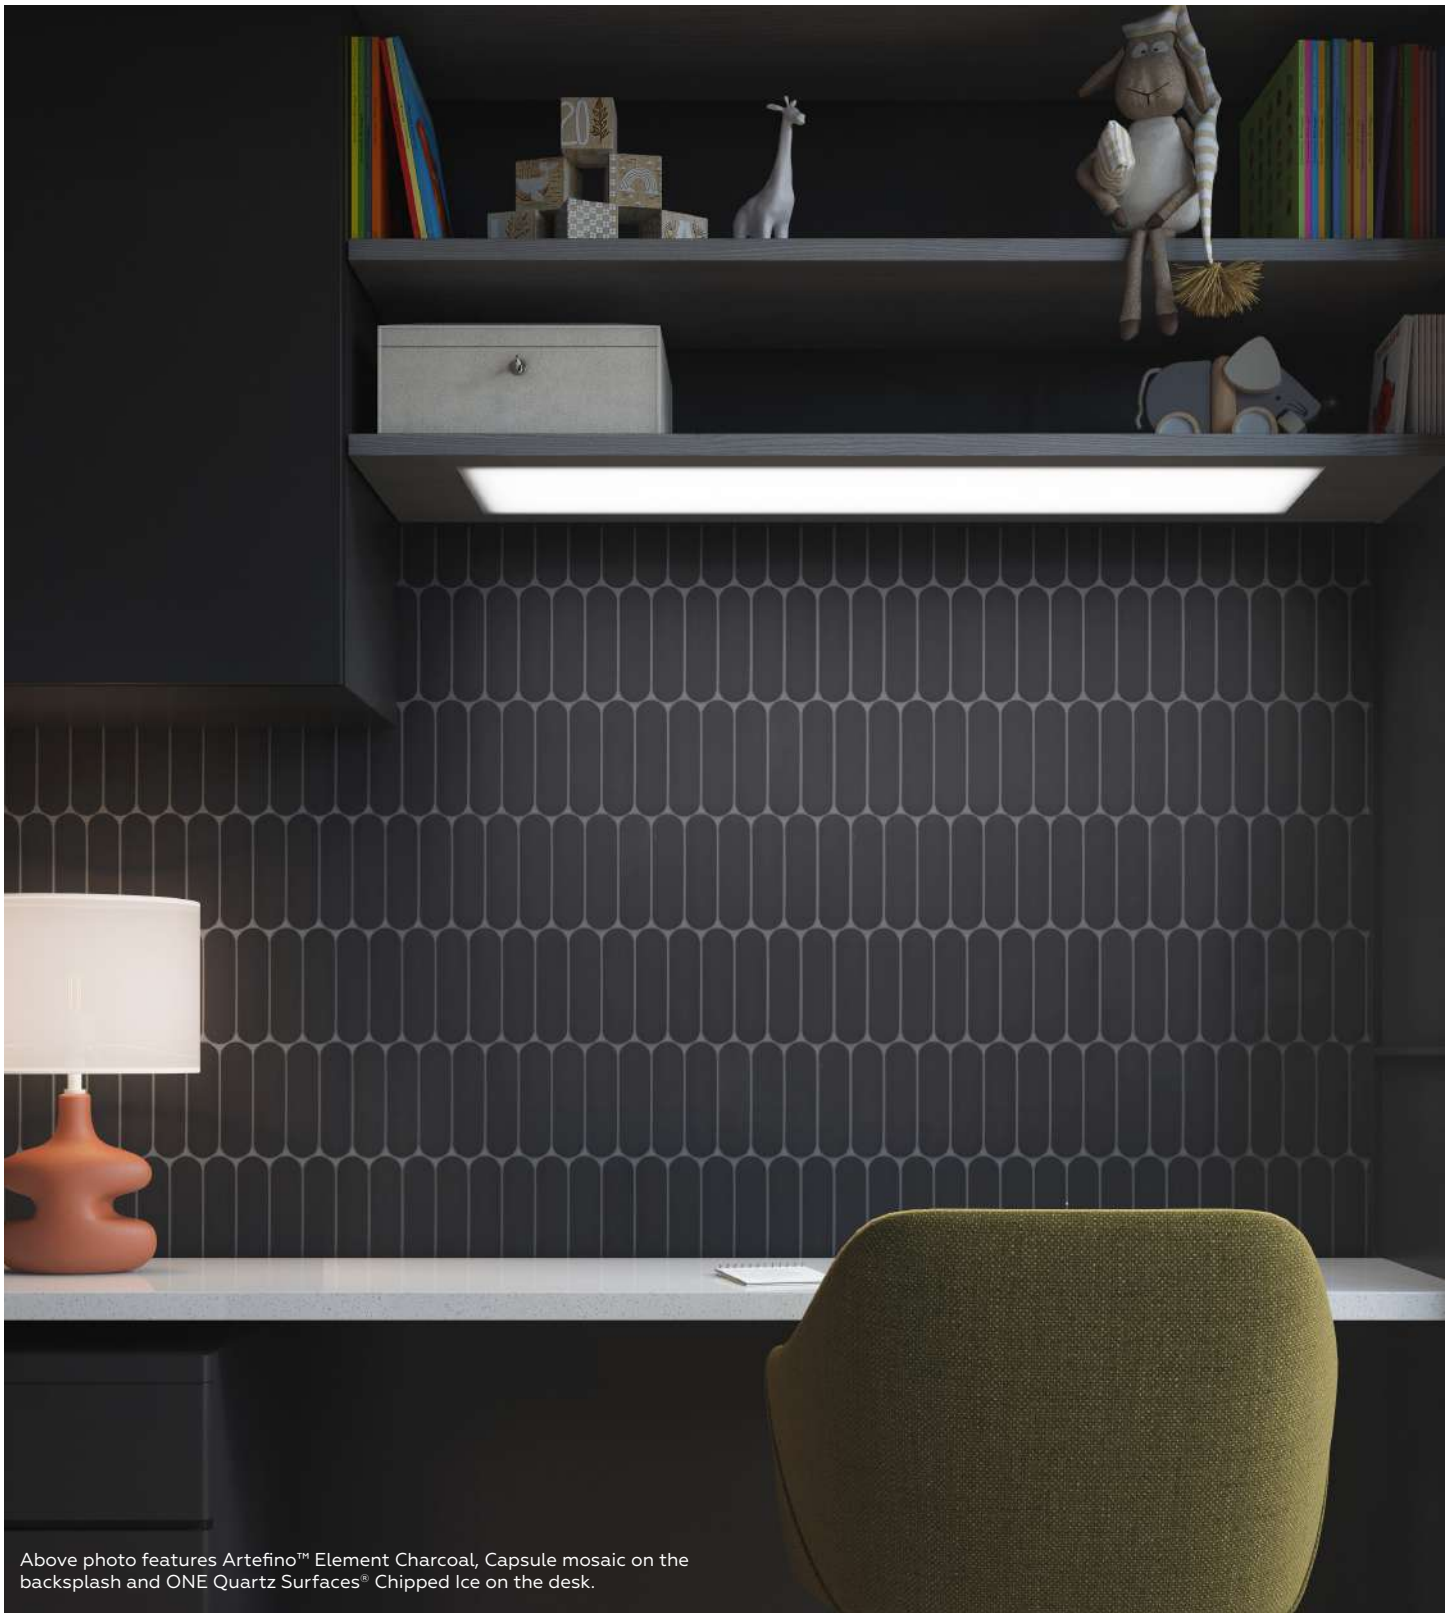
NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

For additional information refer to "Factors to Consider" at: daltile. com/Factors.

VERSATILE PALETTES



Above photo features Artefino™ Element Charcoal, Capsule mosaic on the backsplash and ONE Quartz Surfaces® Chipped Ice on the desk.

ARTEFINO™ ELEMENT

GLAZED PORCELAIN

MOSAIC

SIZES

			Thickness	Finish
	1-1/2 x 6 Capsule Mosaic (Mesh-mounted)	(12-15/16" x 11-9/16" Sheet) (32.89 cm x 29.39 cm Sheet)	1/4"	M

M Matte Finish

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	<5.0%
Breaking Strength	C648	> 250 lbf
Scratch Hardness	C1895	4.0 - 6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors – Standard Center Drain	≥ 0.42	✓
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	✓
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	High (V2)

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

For additional information refer to "Factors to Consider" at: daltile. com/Factors.



Photo features Artefino™ Vintage Jasper, Pencil mosaic on the wall and ONE Quartz Surfaces® Ash Grey on the countertop.

CERTIFIED PORCELAIN TILE
0.5% or less water absorption

U.S. GREEN BUILDING COUNCIL MEMBER

ZEROTOX

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at **daltile.com.**

daltile®
IMAGINE WHAT'S POSSIBLE™

©2025 Daltile (03/25)