



WOOD LOOK

ACREAGE™  
COLORBODY™ PORCELAIN



 daltile®  
IMAGINE WHAT'S POSSIBLE™

# ACREAGE™

COLORBODY™ PORCELAIN

Take the timeless approach of natural hardwood and the lasting durability of ColorBody™ porcelain tile with Acreage. Available in a sprawling 8 x 48 plank, Acreage is crafted with an authentic grain pattern to achieve a realistic, textured look obtained by RevealSync 3D™, Daltile's premier glazing technology. Combine the wide plank with the contemporary 1 x 24 mosaic to create a custom design statement.

## WOOD LOOK

## USAGE



LOW HIGH

NOT APPLICABLE  
FOR ALL PRODUCTS  
IN THIS SERIES. SEE  
CHARTS FOR FULL  
PRODUCT DETAILS.

## SPECIAL FEATURES



Cover photo features Acreage™ Palomino 1 x 24 mosaic on the wall.  
Above photo features Acreage™ Highland 8 x 48 on the floor and Miramo™ Pearl 1 x 6 mosaic on the wall.

SIZES:



FINISHES: MATTE

COLOR PALETTE



PALOMINO



RESERVE



STETSON



HIGHLAND

FLOOR TILE



PALOMINO AC11



RESERVE AC12



STETSON AC13



HIGHLAND AC14

1 x 24 MOSAIC




PALOMINO AC11



RESERVE AC12



STETSON AC13

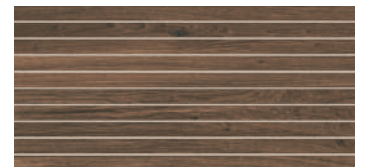

HIGHLAND AC14



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT\*  
\*Not Applicable to Mesh-Mounted Mosaics



CLIMATEPRO™



SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT [WWW.DAL TILE.COM](http://WWW.DAL TILE.COM) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

## SIZES

|                                                                                  |                                 |                                                          | Thickness | Sq. Ft./<br>Carton | Pieces/<br>Carton |
|----------------------------------------------------------------------------------|---------------------------------|----------------------------------------------------------|-----------|--------------------|-------------------|
|  | 8 x 48<br>Floor Tile            | (7-3/4" x 46-15/16")<br>(19.70 cm x 119.20 cm)           | 5/16"     | 15.18              | 6                 |
|  | 1 x 24 Mosaic<br>(Mesh-mounted) | (11-5/8" x 23-3/8" Sheet)<br>(29.56 cm x 59.44 cm Sheet) | 5/16"     | 7.56               | 4                 |

## APPLICATIONS

|                                                                                                            | Target<br>DCOF wet | Suitable |
|------------------------------------------------------------------------------------------------------------|--------------------|----------|
| Dry & Level – Interior Floor                                                                               | N/A                | ✓        |
| Wet & Level – Interior Floor                                                                               | ≥ 0.42             | ✓        |
| Shower Floors (Residential or Light Commercial)                                                            | ≥ 0.42             |          |
| Exterior Floor Applications<br>(including patios, pool decking & other wet areas<br>with minimal footwear) | ≥ 0.60             |          |
| Ramps & Inclines                                                                                           | ≥ 0.65             |          |
| Walls/Backsplashes                                                                                         | N/A                | ✓        |
| Countertops                                                                                                | N/A                | ✓        |
| Pool Linings                                                                                               | N/A                |          |

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [daltille.com/DCOF](https://daltille.com/DCOF).

### APPLICATION NOTES :

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

## INSTALLATION

| Grout Joint Recommendation                                                                                                                      | Shade Variation                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| <b>Floor:</b> 1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.) |  High (V3) |
| <b>Mosaic:</b> 1/8"                                                                                                                             |                                                                                               |

## PERFORMANCE CHARACTERISTICS

|                     | ASTM# | Result    |
|---------------------|-------|-----------|
| Water Absorption    | C373  | < 0.5%    |
| Breaking Strength   | C648  | > 275 lbs |
| Scratch Hardness    | MOHS  | 8.0       |
| Chemical Resistance | C650  | Resistant |

For additional information on test results, visit us at: [daltille.com/information/TestResults](https://daltille.com/information/TestResults).

## DURABILITY

### Floor Surface Wear Resistance

|   |                       |   |                                    |
|---|-----------------------|---|------------------------------------|
| 1 | Residential Bathrooms | 3 | All Residential / Light Commercial |
| 2 | All Residential Areas | ④ | All Residential / Commercial       |

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [daltille.com/Factors](https://daltille.com/Factors).

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [daltille.com/LargeTiles](https://daltille.com/LargeTiles) for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



All or select items within this series meet the requirements for these qualifications. For more information, visit [daltille.com](https://daltille.com).



7834 C.F. Hawn Freeway,  
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of  
Daltille® products and information,  
visit our website at [daltille.com](https://daltille.com).



©2023 Daltille (7/23)