



STONE
LOOK

CALGARY™

COLORBODY™ PORCELAIN with STEPWISE™ TECHNOLOGY



 daltile®
IMAGINE WHAT'S POSSIBLE™

CALGARY™

COLORBODY™ PORCELAIN with STEPWISE™ TECHNOLOGY

Stay grounded with this traditional stone look tile, Calgary, inspired by the Burlington stone found in the English countryside. Infuse tranquility into any space with a calming color selection available in a matte finish and large size options. Center your indoor and outdoor retreat around the organic ColorBody™ Porcelain with StepWise™ Technology.

STONE LOOK

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR



STEPWISE™



TRU-EDGE™



MADE IN
THE U.S.A.



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE




FLEXFIT™



LOW HIGH

SPECIAL FEATURES



Cover photo features Calgary™ Fawn 24 x 24 matte on the exterior floor.

Above photo features Calgary™ Fog 12 x 24 matte on the walkway, Panoramic Porcelain Surfaces™ Metallic Selection Brass cladding on the building, and Delegate™ Light Gray 6 x 24 on the pool trim.

NOT APPLICABLE
FOR ALL PRODUCTS
IN THIS SERIES. SEE
CHARTS FOR FULL
PRODUCT DETAILS.

STONE LOOK

CALGARY™

COLORBODY™ PORCELAIN with STEPWISE™ TECHNOLOGY

SIZES:



24 x 48
Floor Tile



24 x 24
Floor Tile



12 x 24
Floor Tile

FINISHES: MATTE | POLISHED

COLOR PALETTE




LEGACY



FAWN




FOG




ARMOR


FLOOR TILE

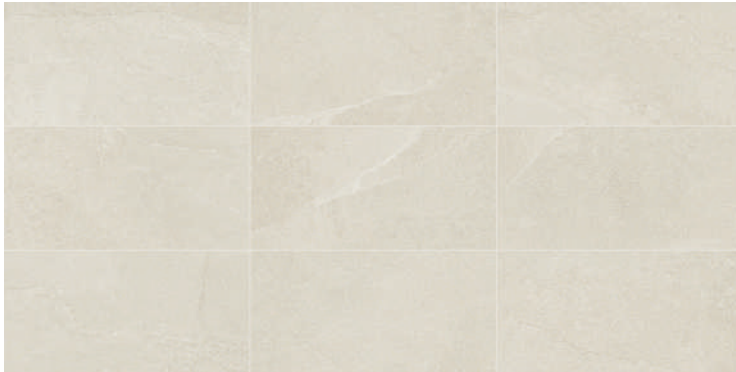


LEGACY CG40

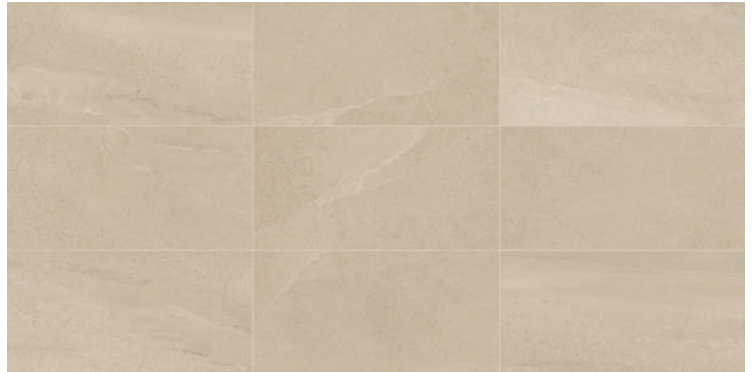

FAWN CG41

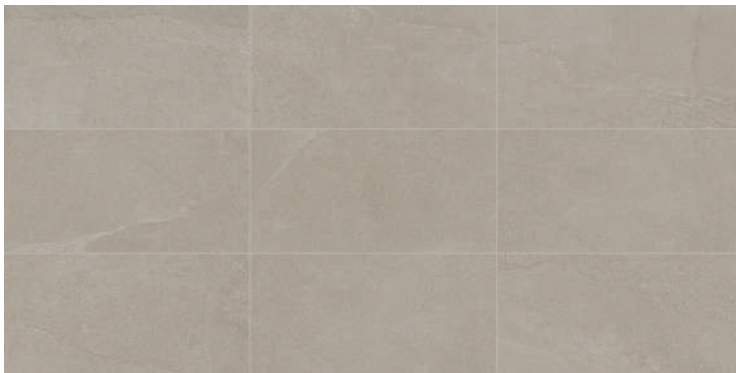

FOG CG42

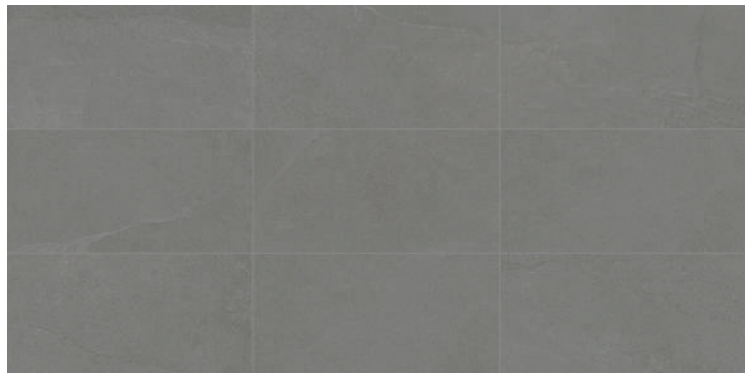

ARMOR CG43

50% MORE
SLIP RESISTANT
THAN ORDINARY TILE*

*When compared to tile meeting ANSI standards.



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT*

*Applicable to products with Matte and Textured Finishes



FIRE-RESISTANT



INDOOR/OUTDOOR



SIMPLECLEAN™

VISIT THE WHY TILE PAGE AT WWW.DAL TILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

CALGARY™

COLORBODY™ PORCELAIN WITH STEPWISE™ TECHNOLOGY

STONE LOOK

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 48 Floor Tile	(23-3/8" x 46-7/8") (59.44 cm x 119.20 cm)	5/16"	15.26	2
	24 x 24 Floor Tile	(23-3/8" x 23-3/8") (59.44 cm x 59.44 cm)	5/16"	15.21	4
	12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.56 cm x 59.44 cm)	5/16"	17.02	9

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓*
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floor – Linear Drain	≥ 0.60	✓**
Exterior Floor Applications, including patios, pool decking & other wet areas with minimal footwear	≥ 0.60	✓*
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Matte Finish only.

** 12 x 24 in matte finish only



All or select items within this series meet the requirements for these qualifications. For more information, visit daltille.com.

TRIM

	Type	Number	Size	Pieces/ Carton
	Bullnose	P43F9	3 x 24	10
	Cove Base*	P36C9	6 x 12	22
	Cove Base Outcorner*	PC36C9	1 x 6	15

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

*Available in matte finish only

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Matte Result	Polished Result
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648	> 275 lbs	> 275 lbs
Scratch Hardness	MOHS	8.0	6.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: daltille.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance			
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltille.com/Factors

To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltille.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.



7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltille® products and information,
visit our website at daltille.com.

