



Fluida Aurea




2 x 2 Mosaic Mesh




Hex 4 Inch Mesh



Trapezoid Mesh



Fluida Carbo




2 x 2 Mosaic Mesh




Hex 4 Inch Mesh




Trapezoid Mesh




Fluida Graphite



2 x 2 Mosaic Mesh



Hex 4 Inch Mesh



Trapezoid Mesh




Fluida Luminis



2 x 2 Mosaic Mesh



Hex 4 Inch Mesh



Trapezoid Mesh



Fluida Nebula



2 x 2 Mosaic Mesh




Hex 4 Inch Mesh



Trapezoid Mesh

When installing rectangular or square tiles 15 inches or longer with a staggered joint, it is recommended that the offset should not exceed 33%, unless otherwise specified by the manufacturer.

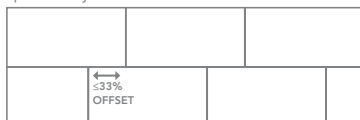

For packaging information, please contact your local Arizona Tile.

DCOF rating is a measurement of a tile's frictional resistance. It is the specifier's responsibility to ensure the chosen tile is appropriate for each interior and exterior application.

Please view actual material when making your selection, as the images on this page are only representative.

Revised 03/09/26

MADE IN ITALY

PRODUCT TYPE

Rectified Color Body Porcelain
3D Digital Print Technology

STOCKED COLORS

Fluida Aurea
Fluida Carbo
Fluida Graphite
Fluida Luminis
Fluida Nebula

STOCKED FINISHES

Matte

*Active R11 Finish™

STOCKED SIZES

12 x 24

8 x 48

24 x 48

*24 x 48 Active R11 Finish

2 x 2 Mosaic Mesh

Hex 4" Mesh

Trapezoid Mesh

*Specifically designed for outdoor, exposed areas as well as wet applications, including shower floors. To be certified as R11, a tile must pass internationally-recognized testing.

To learn more, visit www.arizonatile.com

The Outer Limits® Collection includes products designed for outdoor living, featuring slip-resistant porcelain tiles, and countertop materials ideal for outdoor kitchens and exposed environments. Please confirm which exterior surface(s) a product is recommended for in the Products section of our website.

RECOMMENDED USES

Commercial
Residential
Interior Floor
*Exterior Floor
Interior Wall
Exterior Cladding
Fireplaces
Shower Walls
**Shower Floors
Steam Showers
Pool & Spa
*24 x 48 Active R11 Finish Only
**2 x 2 Mosaic Mesh, Hex 4" Mesh and
24 x 48 Active R11 Finish Only

STOCKED TRIM

3 x 12 SBN

DYNAMIC C.O.F. WET: ≥0.42

P.E.I RATING: 4

FROSTPROOF: yes

DCOF rating is a measurement of a tile's frictional resistance. The above result is for the Standard Finish. The testing for R11 Finish is static, which is different from the Dynamic Coefficient of Friction (DCOF) test which is a dynamic test. These two tests measure for different and separate results, therefore the DCOF test is not the appropriate test for the R11 Finish.

**PRODUCT CONTAINS
>20%PRE-CONSUMER
RECYCLED CONTENT**

The Fluida series is an Italian-made rectified color body porcelain that is available in two finishes, including the Active R11 Finish. Created using 3D digital print technology, the Fluida porcelain tile design mimics a natural stone with layers of minerals accumulated over time which create visually interesting patterns.

Continue your indoor tile to your exterior living spaces with Fluida 24 x 48, which is available in the Active R11 Finish. These products maintain the same technical features and performance results as the R11 finish and to be certified must pass an internationally recognized analysis showing that a person can maintain balance while standing on the wet tile at an incline of 19 to 27 degrees. The slip resistant effect for the Active R11 Finish is achieved differently than the R11 finish. Specific glazes are applied to the surface of the tile, instead of minerals. These glazes are activated when in contact with water and/or in wet conditions, therefore making the tile fully suitable for all outdoor applications (covered or uncovered), pool side applications and wet indoor areas. When dry, the tiles feel very similar to tiles that do not have the Active R11 Finish.

Piece to piece variation in shade or color are inherent in all fired clay products; therefore, it is recommended to mix tiles from several boxes at a time during installation to achieve the best range of color. When mixing sizes within a series, shade, texture and calibration differences should be expected. This series is suitable for residential and commercial applications. Because this material is a porcelain product, minimal maintenance is required. For proper bonding, LFT/LHT mortar for large format and heavy tiles should be used when installing tiles with a dimensional length greater than 15 inches, and rectangular shape and plank tile, per industry standards. Proper thinset coverage is also necessary, and in some cases, back buttering of tile may be required.