



	Technical Specifications	Standard Requirements	Test Results
٨	Water Absorption UNI EN ISO 10545-03	E≤0.5%	≤0.5%
<u></u>	Breaking Strength UNI EN ISO 10545-04	≥1300 N	≥ 1300 N
<b>↓</b>	Modulus of Rupture UNI EN ISO 10545-04	> 35 N/mm²	> 35 N/mm²
-	Shock Resistance UNI EN ISO 10545-05	Suggested Minimum: E > 0.55	N/A
<u>(</u>	Resistance to Deep Abrasion UNI EN ISO 10545-06	Maximum: 175 mm³	≤ 175 mm³
_ <u>‡</u>	Thermal Linear Expansion UNI EN ISO 10545-08	As Reported	6 x 10⁴/°C
**	Thermal Shock Resistance UNI EN ISO 10545-09	Required	Resistant
300	Moisture Expansion UNI EN ISO 10545-10	As Reported	N/A
*	Frost Resistance UNI EN ISO 10545-12	As Reported	Resistant
M	Chemical Resistance UNI EN ISO 10545-13	Domestic Chemical Products: UB/ GB Acids and Alkalis: As Reported	A LA
×	Stain Resistance UNI EN ISO 10545-14	Minimum: Class 3	Class 5
PEI	PEI Rating (Scratch Resistance) ASTM C 1027	As Reported	N/A
	Dynamic Coefficient of Friction (DCOF) ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When wet: ≥ 0.42	≥ 0.42
	Shade Variation	As Reported	VO
<b>↓</b>	Thickness	As Reported	12" x 24" - 10 mm 24" x 24" - 10 mm 24" x 48" - 10.5 mm 36" x 36" - 10.5 mm 5.5" x 6.3" - 8.7 mm 12" x 36" Line - 8.7 mm
₩	Number of Screens	As Reported	12" x 24" - 1 24" x 24" - 1 24" x 48" - 1 36" x 36" - 1 5.5" x 6.3" - 1 12" x 36" Line - 1

Grout joint required for rectified edge tile 1/2 broken joint not recommended | INSTALLATION TIPS




















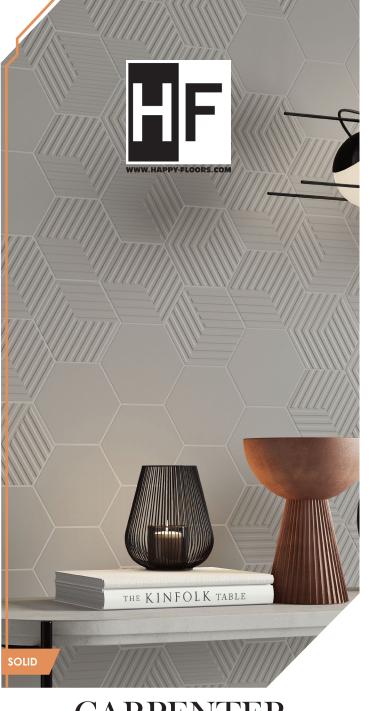

## **CARPENTER**

FULL BODY RECTIFIED PORCELAIN & WHITE BODY RECTIFIED CERAMIC WALL TILE





# CARPENTER

Simple, bold, noteworthy: Carpenter is a clean set of five colors without need of elaboration. With colors that fit any room, Carpenter's integrity is its greatest asset.

#### WHITE BODY RECTIFIED CERAMIC WALL TILE **ALBAR PEARL TAUPE** 12" x 36" Line 12" x 36" Line 12" x 36" Line **GREY** DARK 12" x 36" Line 12" x 36" Line

#### **FULL BODY RECTIFIED PORCELAIN**

### **ALBAR**

24" x 48"

**PEARL** 

24" x 48"

**TAUPE** 

24" x 48"

**GREY** 

24" x 48"

DARK

24" x 48"



3" x 24" Bullnose

36" x 36"

36" x 36"

36" x 36"

36" x 36"

3" x 24" Bullnose

3" x 24" Bullnose

3" x 24" Bullnose

3" x 24" Bullnose



5.5" x 6.3"

Hexagon

24" x 24"

5.5" x 6.3"

Hexagon

24" x 24"

5.5" x 6.3"

Hexagon

5.5" x 6.3"

Hexagon

24" x 24"













































