



Designs for your lifestyle



OREGON



OREGON



OREGON RUSTIC BIANCO
Code: ORE-RUS-BIA-848
Size: 7.9x47.2"



OREGON RUSTIC BIANCO HEX
Code: ORE-RUS-BIA-HEX
Size: 9.8x11.8"



OREGON RUSTIC BIANCO DECO
Code: ORE-RUS-BIA-DEC
Size: 11.8x47.2"



Product Name	Code	Material	Surface	Size	Thickness	Coverage sq.ft	Sold By	Packing pcs/box	Sq.Ft box	Weight sheet or sq.ft	Weight box
OREGON RUSTIC BIANCO	ORE-RUS-BIA-848	Porcelain	Matte	7.9x47.2"	5/16"	2.589	box	4 pcs/box	10.36	5.14	53.24
OREGON RUSTIC BIANCO DECO	ORE-RUS-BIA-DEC	Porcelain	Matte	11.8x47.2"	5/16"	3.868	box	4 pcs/box	15.47	4.55	70.40
OREGON RUSTIC BIANCO HEX	ORE-RUS-BIA-HEX	Porcelain	Matte	9.8x11.8"	5/16"	0.803	sheet	5 pcs/box	4.02	3.52	17.60





OREGON



OREGON AGATA
Code: ORE-AGT-848
Size: 7.9x47.2”



OREGON AGATA HEX
Code: ORE-AGT-HEX
Size: 9.8x11.8”



OREGON AGATA DECO
Code: ORE-AGT-DEC
Size: 11.8x47.2”



Product Name	Code	Material	Surface	Size	Thickness	Coverage sq.ft	Sold By	Packing pcs/box	Sq.Ft box	Weight sheet or sq.ft	Weight box
OREGON AGATA	ORE-AGT-848	Porcelain	Matte	7.9x47.2”	5/16”	2.589	box	4 pcs/box	10.36	5.14	53.24
OREGON AGATA DECO	ORE-AGT-DEC	Porcelain	Matte	11.8x47.2”	5/16”	3.868	box	4 pcs/box	15.47	4.55	70.40
OREGON AGATA HEX	ORE-AGT-HEX	Porcelain	Matte	9.8x11.8”	5/16”	0.803	sheet	5 pcs/box	4.02	3.52	17.60






OREGON



OREGON FUME
Code: ORE-FUM-848
Size: 7.9x47.2"

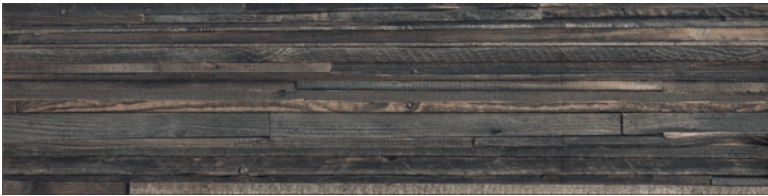

OREGON FUME DECO
Code: ORE-FUM-DEC
Size: 11.8x47.2"



OREGON FUME HEX
Code: ORE-FUM-HEX
Size: 9.8x11.8"

Product Name	Code	Material	Surface	Size	Thickness	Coverage sq.ft	Sold By	Packing pcs/box	Sq.Ft box	Weight sheet or sq.ft	Weight box
OREGON FUME	ORE-FUM-848	Porcelain	Matte	7.9x47.2"	5/16"	2.589	box	4 pcs/box	10.36	5.14	53.24
OREGON FUME DECO	ORE-FUM-DEC	Porcelain	Matte	11.8x47.2"	5/16"	3.868	box	4 pcs/box	15.47	4.55	70.40
OREGON FUME HEX	ORE-FUM-HEX	Porcelain	Matte	9.8x11.8"	5/16"	0.803	sheet	5 pcs/box	4.02	3.52	17.60





OREGON



OREGON WHITE WOOD
Code: ORE-WHT-WD-848
Size: 7.9x47.2"



OREGON WHITE WOOD HEX
Code: ORE-WHT-WD-HEX
Size: 9.8x11.8"



OREGON GREY WOOD
Code: ORE-GR-WD
Size: 7.9x47.2"



OREGON GREY WOOD HEX
Code: ORE-GR-WD-HEX
Size: 9.8x11.8"

Product Name	Code	Material	Surface	Size	Thickness	Coverage sq.ft	Sold By	Packing pcs/box	Sq.Ft box	Weight sheet or sq.ft	Weight box
OREGON WHITE WOOD	ORE-WHT-WD-848	Porcelain	Matte	7.9x47.2"	5/16"	2.589	box	4 pcs/box	10.36	5.14	53.24
OREGON WHITE WOOD HEX	ORE-WHT-WD-HEX	Porcelain	Matte	9.8x11.8"	5/16"	0.803	sheet	5 pcs/box	4.02	3.52	17.60
OREGON GREY WOOD	ORE-GR-WD	Porcelain	Matte	7.9x47.2"	5/16"	2.589	box	4 pcs/box	10.36	5.14	53.24
OREGON GREY WOOD HEX	ORE-GR-WD-HEX	Porcelain	Matte	9.8x11.8"	5/16"	0.803	sheet	5 pcs/box	4.02	3.52	17.60



Proprietà fisico chimiche/Physical-chemical properties Caractéristiques physiques-chimiques/physische Chemische eigenschaften	Norme/Norms Normes Normen	Valori presvalori prescritti / Required values Valeurs exigées / Vorgeschriebene werte			
Dimensioni Sizes Format Format	ISO 10545-2	Lunghezza e larghezza Length and width Longueur et largeur Länge und Breite	(± 0,75% 190 cm² < 410 ≤) (± 0,6 % > 410 cm2)	± 0,3% ± 1,5 mm	
		Rettilinearità spigoli Linearity Rectitude de l'angularité Kantengeradheit	(± 0,5% max)	± 0,3% ± 1,5 mm	
		Ortogonalità Wedging Orthogonalité Rechtwinkligkeit	(± 0,6% max)	± 0,3% ± 1,5 mm	
		Planarità Warpage Planéité Ebenflächigkeit	(± 5% max)	± 0,3% max ± 1,5 mm	
	ASTM C485			Warpage diagonal/edge ± 0,4%	
Spessore Thickness Épaisseur Stärke	ISO 10545-2		(± 5% max)	10 mm	
Assorbimento d'acqua Water absorption Absorption d'eau Wasseraufnahme	ISO 10545-3		≤ 0,5% GRUPPO Bla GL	E ≤ 0,1% Bla - GL	
Resistenza a flessione e forza di rottura Moduls of rupture and breaking strength résistance à la flexion et force de rupture Biegefestigkeit und Bruchlast	ISO 10545-4		S ≥ 1300 N	S ≥ 1300 N	
			R ≥ 35 N/mm²	R ≥ 35 N/mm²	
Resistenza agli sbalzi termici Thermal shocks resistant Résistance aux variations thermiques Temperaturwechselbeständigkeit	ISO 10545-9		Requisito non previsto Not provided requirement Qualité pas prévue Erfordernis nicht vorgesehen	Resistente Resistant Résistant Widerstandsfähigkeit	
Resistenza al gelo Frost resistance Résistance au gel Froständigkeit	ISO 10545-12		Nessuna alterazione No alteration Aucune altération Keine Änderung	Resistente Resistant Résistant Widerstandsfähigkeit	
Resistenza alla abrasione della superficie di piastrelle smaltate Resistance to surface abrasion of glazed tiles Résistance à l'abrasion de la surface des carreaux émaillés Widerstand gegen Abrieb der Oberfläche der glasierten Fliesen	ISO 10545-7			Bianco: Classe 4, Class 4, Classe 4, Gruppe 4 Agata / Fumée / Quarzo: Classe 3, Class 3, Classe 3, Gruppe 3	
Coefficiente di dilatazione termica lineare (50°/400°) Linear thermal expansion coefficient (50°/400°) Dilatation thermique linéaire (50°/400°) Lineare Wärmeausdehnung (50°/400°)	ISO 10545-8			Metodo disponibile Test method available Méthode disponible Verfügbares Verfahren	
Durezza della Superficie Surface resistance Dureté de la surface Ritzhärte deo Oberfläche	EN 101			> 6	
Resistenza all'attacco chimico (tranne acido fluoridrico) Resistance to chemical attack (except hydrofluoric acid) Résistance à l'attaque chimique (sauf acide fluorhydrique) Säure-und Laugenbeständigkeit (außer Flußsäure)	ISO 10545-13		Come indicato dal produttore As indicated by manufacturer Comme indiqué par le producteur Wie vom Hersteller angegeben	Classe A - LA - HA Class A - LA - HA Classe A - LA - HA Gruppe A - LA - HA	
Resistenza alle macchie Resistance to staining Résistance aux taches Fleckbeständigkeit	ISO 10545-14		CLASSE min. 3	Classe 5 Class 5 Classe 5 Gruppe 5	
Coefficiente di attrito Coefficient of friction Coefficient de frottement Reibungskoeffizient	DIN 51130			Rt0	Rt1
	DIN 51097			Classe B Class B Classe B Gruppe B	Classe C Class C Classe C Gruppe C
Resistenza alla scivolosità. Coefficiente di attrito medio Skid resistance. Average coefficient of friction Résistance au glissement. Coefficient de frottement moyen Rutschfestigkeit. Mittlerer Reibungswert	B.C.R.A. (No Lapp)		μ > 0,40 (Wet) μ > 0,40 (Dry)	0,40 ≤ μ ≤ 0,74	
	DCOF Acu Test (No Lapp)		≥ 0,42	μ ≥ 0,42	
Variazione cromatica Colour shading Variations chromatiques Chromatische Abweichungen				V 3	

MIR Group, Inc.
2200 B Zanker Rd, San Jose, CA 95131
Ph: +1 408 432-5400,
+1 408 432-1000
fax: +1 408 228-3924
e-mail: info@mir-mosaic.com
 www.facebook.com/mir.mosaic
www.mir-mosaic.com

