OUTDOOR COLLECTION

Ottimo
ceramics

BOSTON

Shown Boston Ivory in 16x32

Ottimo

BOSTON

Color Body Porcelain Paver

16x32 Matte

BST01PV - Boston White

BST02PV - Boston Ivory

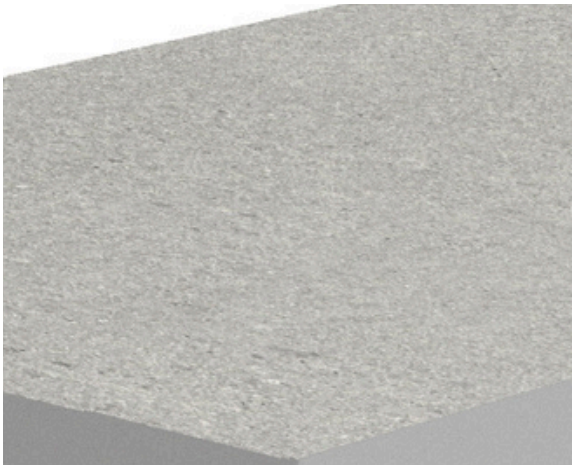

BST03PV - Boston Gray

Ottimo ceramics

ELEMENT

Shown Element White in 24x24

Ottimo ceramics

ELEMENT

Color Body Porcelain Paver

24x24 Matte

ELE01PV- Element White

ELE02PV- Element Gray

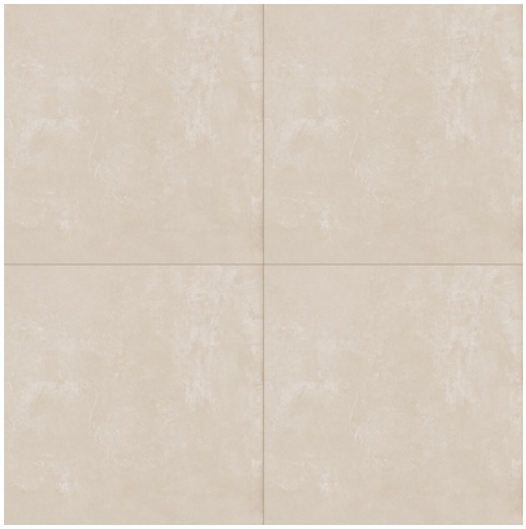

ELE03PV- Element Beige

Ottimo ceramics

OASIS

Shown Oasis Gray in 24x24

Ottimo

OASIS

Color Body Porcelain Paver

24x24 Matte

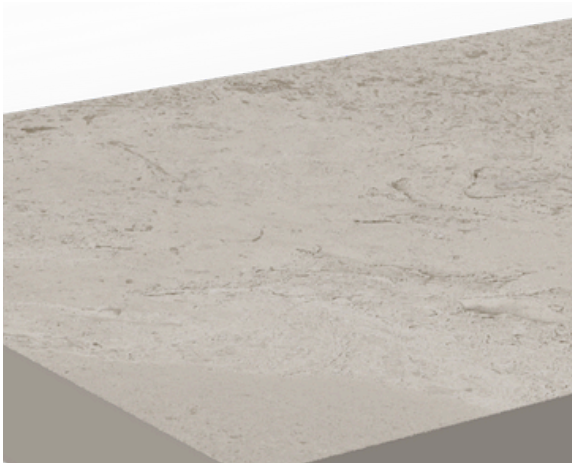

OAS010PV - Oasis Beige

OAS011PV - Oasis Gray

Ottimo ceramics

CARRARA

Shown: Carrara White in 24x24

Ottimo ceramics

CARRARA

Color Body Porcelain Paver

24x24 Matte

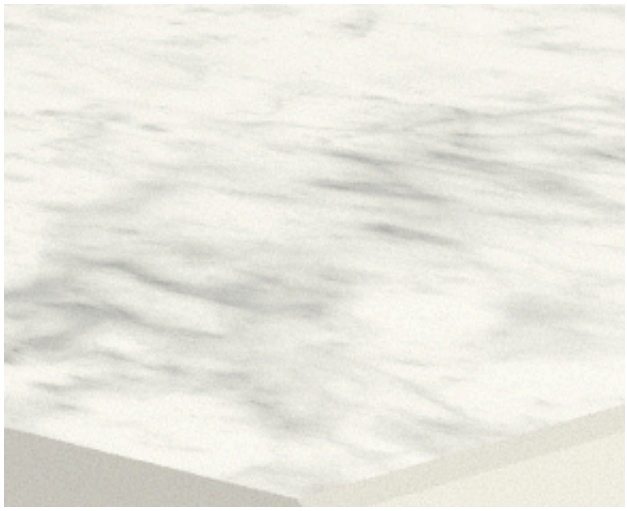

CAR010PV - Carrara White

Ottimo ceramics

BIANCO DOLOMITE

Shown Bianco Dolomite in 24x24

ottimo ceramics

BIANCO DOLOMITE

Color Body Porcelain Paver

24x24 Matte

BCD010PV - Bianco Dolomite White

Ottimo ceramics

SPECIFICATIONS

Collection	Color	Item	Exact Size	Thickness	Finish	Edge
Boston	White	BST01PV	40x80 cm	20 mm	Matte	Pressed
	Ivory	BST02PV				
	Gray	BST03PV				
Element	White	ELE01PV	60x60 cm			
	Gray	ELE02PV				
	Beige	ELE03PV				
Oasis	Beige	OAS010PV				
	Gray	OAS011PV				
Carrara	White	CAR010PV				
Bianco Dolomite	White	BCD010PV				

TEST RESULTS

	Established Limits	Performances	Norms
Water absorption	≤ 0.5%	~0,1%	ASTM C 373
Breaking strength (1)	≥ 250 lbf.	~3000lbf.	ASTM C 648
Frost resistance	Resistant	Resistant	ASTM C 1026
Resistance to thermal shock	Resistant	Resistant	ASTM C 484
Averagee breaking load for raised floor installation (2)		Classe1	EN 12825*
		16”x32” : > 4kN	
		24”x24” : > 4kN	
		Classe2	
		16”x48” : > 6kN	
Mechanical strength (3)		16”x32” : U4	EN 1339-F*
		24”x24” : U7	
Slip resistance (DCOF)	≥ 0.42	≥0.60	ANSIA326.3: 2017 release 2019. (DCOF)
Chemical resistance	As reported	Class: A	ASTM C 650
Stain resistance	As reported	Class: A	ASTM C 1378
*Tests carried out on a different type from that for which the standard is issued			
(1) It states the resistance of a sample piece, leaning on three spots,to a concentrated load placed in the middle.			
(2) It shows the resistance,on raised floor laying as suggested by the catalogue, to a the concentrated load applied in the middle.			
(3) It shows the breaking resistance through bending of the product in full size. The load is applied through a horizontal cylinder placed in the middle.			

PACKAGING

Size	Pcs/box	Sqft/box	Box/pallet	Sqft/pallet	Lbs/box	Lbs/Pallet
16x32	2	6.89	24	165.36	64.66	1552
24x24	2	7.75	32	248	71.17	2277.3