

The elegant veining of Nobleza™ recreates the classic look of rich Italian marble but provides all the benefits of porcelain tile. This series beautifully mirrors the subtle color variations and movement found in natural marble and provides design versatility for any size project from commercial to residential. Perfect for floors and walls, Nobleza™ adds a luxurious feel to any space.


**NOBLEZA™**

*Glazed Porcelain*





Lugo

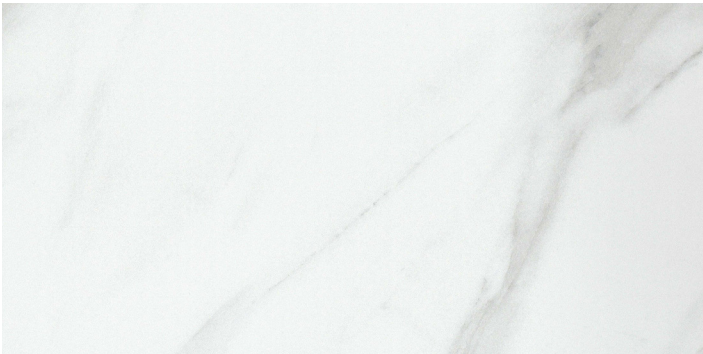


Astorga









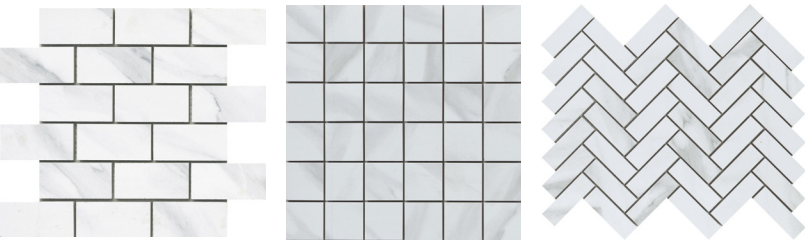

Mosaics




Lugo



Astorga

SIZES									
	32" x 32" 31.50" x 31.50"	24" x 24" 23.62" x 23.62"	24" x 47" 23.62" x 47.24"	12" x 24" 11.81" x 23.62"	12" x 12" 11.81" x 11.81"	12" x 12" Mesh	12" x 12" Mesh 11.73" x 11.73"	10' x 12" Herringbone 9.72' x 12.48'	3" x 12" Floor SBN
	10mm	8.8mm	10mm	8.8mm	8.8mm	8.8mm	8.8mm	8.8mm	8.8mm
	7	7	5	12	8	N/A	N/A	N/A	N/A
	Matte & Polished	Matte & Polished	Matte & Polished	Matte & Polished	Matte	Matte	Matte	Matte	Matte & Polished
Grout Joint Recommendation	Rectified	Rectified	Rectified	Rectified	Rectified	Cut	Cut	Cut	Cut/Rounded
	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"
	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating		
	II (Polished) III (Matte)	>350 lbf	Resistant	<0.5%	<0.42 - Polished ≥0.42 - Matte	6	V2	Recommended 33% Offset*	

-  Sustainability Attributes
- Red List Free
  - Health Product Declaration (HPD) provided upon request
  - Product Packaging is 100% recyclable

• VOC Free

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joining patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.