




KIWI				
	Technical Specifications	Reference Standard	Standard Requirements	Test Results
	Water Absorption	UNI EN ISO 10545-03	< 0.5 %	In Accordance
	Breaking Strength	UNI EN ISO 10545-04	Minimum: 1300 N	In Accordance
	Modulus of Rupture	UNI EN ISO 10545-04	Minimum: 35 N/mm²	In Accordance
	Shock Resistance	UNI EN ISO 10545-05	Suggested Minimum: e > 0.55	Resistant
	Resistance to Deep Abrasion	UNI EN ISO 10545-06	Maximum: 175 mm³	In Accordance
	Thermal Shock Resistance	UNI EN ISO 10545-09	Resistant	In Accordance
	Frost Resistance	UNI EN ISO 10545-12	As Reported	Resistant
	Chemical Resistance	UNI EN ISO 10545-13	Domestic Chemical Products: UB / GB Acids and Alkalies: As Reported	In Accordance
	Stain Resistance	UNI EN ISO 10545-14	Minimum: Class 3	In Accordance
PEI	PEI Rating (Scratch Resistance)	ASTM C 1027	As Reported	III: Nero. IV: Blu, Grigio, Marrone, Bianco, Miele.
DCOF	Dynamic Coefficient of Friction (DCOF)	ANSI A137.1	For Level Interior Spaces Expected to be Walked Upon When Wet : > 0.42	6" x 24" Grip / Sanded Finish = 0.61 8" x 48" = 0.54
V2	Shade Variation	Not Available	As Reported	V2
	Thickness	Not Available	As Reported	8" x 48" = 6" x 24" = 10 mm 9,6
	Number of Screens	Not Available	As Reported	8" x 48" = 19 6" x 24" = 38



MADE IN
ITALY

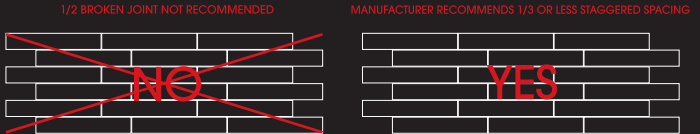

KIWI
PORCELAIN



BLU



NERO



BLU



BIANCO



GRIGIO



MARRONE


MARRONE



8"x 48"



6"x 24"



6"x 24" Grip / Sanded Finish



3"x 24" Bullnose

MIELE



8"x 48"



6"x 24"



6"x 24" Grip / Sanded Finish



3"x 24" Bullnose

GRIGIO



8"x 48"



6"x 24"



6"x 24" Grip / Sanded Finish



3"x 24" Bullnose

BIANCO



8"x 48"



6"x 24"



6"x 24" Grip / Sanded Finish



3"x 24" Bullnose

NERO



8"x 48"



6"x 24"



6"x 24" Grip / Sanded Finish



3"x 24" Bullnose

BLU




8"x 48"



6"x 24"



6"x 24" Grip / Sanded Finish



3"x 24" Bullnose